
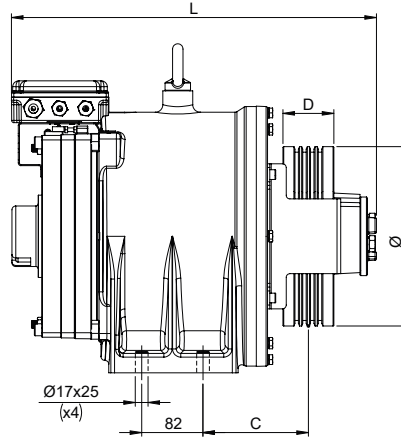


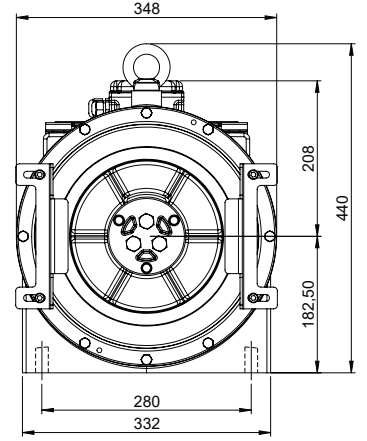

L	C	D	Ø
498	141	68	210*4-5-6*6,5
			240*4-5-6*6,5

Askı Tipi 2:1 Ropping Type 2:1		Seyir Mesafesi 51 Metre Travel Distance 51 Meter		Statik Yük 7000 Kg Static Load 7000 Kg		IP 54 - İzolasyon Sınıfı F IP 54 - Isolation Class F			240St/h 240St/h	
Ürün Product	Hız Speed [m/s]	Kapasite Duty Load [kg]	Güç Power [kW]	Kasnak Sheave [mm]	Akım Current [A]	Kutup Poles	Frekans Frequency [Hz]	Devir Revolution [rpm]	Tork Torque [Nm]	Makine Ağırlığı Machine Weight [kg]
AK1	0,63	320	1,2	210x5x6,5	3,7	20	19,17	115	103	150
	1,00		2,0		5,2		30,33	182		
	1,60		3,1		7,8		48,50	291		
	2,00		3,9		9,8		60,67	364		
	2,50		4,9		12,2		75,83	455		
	0,63	400	1,5		4,7		19,17	115	129	
	1,00		2,4		6,5		30,33	182		
	1,60		3,9		9,8		48,50	291		
	2,00		4,9		12,2		60,67	364		
	2,50		6,1		15,3		75,83	455		
	0,63	320	1,2	240x4x6,5	3,7		16,67	100	118	
	1,00		2,0		5,2		26,50	159		
	1,60		3,1		7,8		42,50	255		
	2,00		3,9		9,8		53,00	318		
	2,50		4,9		12,2		66,33	398		
	0,63	400	1,5		4,7		16,67	100	147	
	1,00		2,5		6,5		26,50	159		
	1,60		3,9		9,8		42,50	255		
	2,00		4,9		12,2		53,00	318		
	2,50		6,1		15,3		66,33	398		