


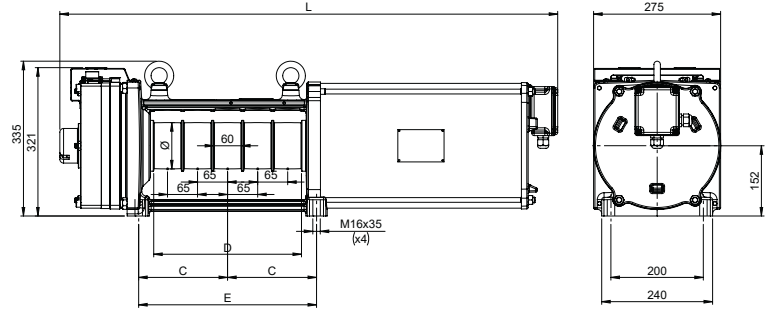

L	E	C	D	Ø
1167,5	450	225	360	Ø100x6x30-65
2117,5	1400	700	1120	Ø100x6x30-260
1102,5	385	192,5	340	Ø120x5x30-65
1167,5	450	225	360	Ø120x6x30-65
2117,5	1400	700	1120	Ø120x6x30-260
1102,5	385	192,5	340	Ø130x5x30-65

Askı Tipi 2:1 Ropping Type 2:1		Seyir Mesafesi 33 Metre Travel Distance 33 Meter		Statik Yük 7000 Kg Static Load 7000 Kg		IP 54 - İzolasyon Sınıfı F IP 54 - Isolation Class F			180St/h 180St/h	
Ürün Product	Hız Speed [m/s]	Kapasite Duty Load [kg]	Güç Power [kW]	Kasnak Sheave [mm]	Akım Current [A]	Kutup Poles	Frekans Frequency [Hz]	Devir Revolution [rpm]	Tork Torque [Nm]	Makine Ağırlığı Machine Weight [kg]
KS400	0,30	2500	4,9	100x6x30-65 100x6x30-260	18,6	20,00	19,10	115	405	
	0,40		6,5		21,7		25,46	153		
	0,50		8,1		27,1		31,83	191		
	1,00		16,2		38,2		63,66	382		
	1,60		25,9		61,1		101,86	611		
	1,75		28,4		66,9		111,41	668		
	2,00		32,4		76,4		127,32	764		
	2,50		40,5		95,5		159,15	955		
	0,30	2000	3,9	120x5x30-65	17,4		15,92	95	390	
	0,40		5,2		18,5		21,22	127		
	0,50		6,5		21,7		26,53	159		
	1,00		13,0		30,6		53,05	318		
	1,60		20,8		48,9		84,88	509		
	1,75		22,8		53,5		92,84	557		
	2,00		26,0		61,1		106,10	637		
	2,50		32,5		76,4		132,63	796		
	0,30	2500	4,9	120x6x30-65 120x6x30-260	21,8		15,92	95	490	
	0,40		6,5		23,3		21,22	127		
	0,50		8,2		27,3		26,53	159		
	1,00		16,3		38,2		53,05	318		
	1,60		26,1		61,1		84,88	509		
	1,75		28,6		66,9		92,84	557		
	2,00		32,7		76,4		106,10	637		
	2,50		40,8		95,5		132,63	796		
	0,30	2000	3,9	130x5x30-65	17,5		14,69	88	425	
	0,40		5,2		20,0		19,59	118		
	0,50		6,5		23,3		24,49	147		
	1,00		13,1		30,6		48,97	294		
	1,60		20,9		48,9		78,35	470		
	1,75		22,9		53,5		85,70	514		
	2,00		26,2		61,1		97,94	588		
	2,50		32,7		76,4		122,43	735		