
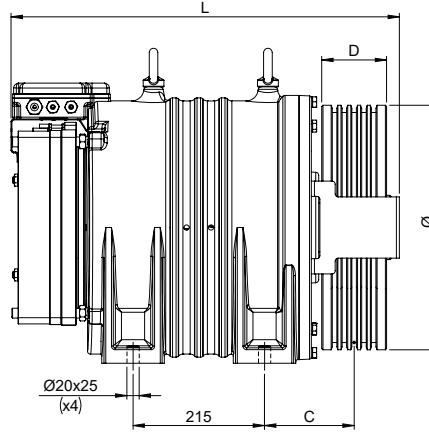


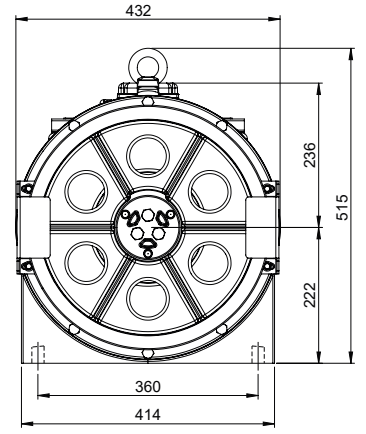

L	C	D	Ø
685	161	135,2	320*9-10*8
640	148,3	109,6	360*7-8*8
635	146,5	106	400*4-5-6*10

Askı Tipi 2:1 Ropping Type 2:1		Seyir Mesafesi 33 Metre Travel Distance 33 Meter		Statik Yük 7000 Kg Static Load 7000 Kg		IP 54 - İzolasyon Sınıfı F IP 54 - Isolation Class F			240St/h 240St/h	
Ürün Product	Hız Speed [m/s]	Kapasite Duty Load [kg]	Güç Power [kW]	Kasnak Sheave [mm]	Akım Current [A]	Kutup Poles	Frekans Frequency [Hz]	Devir Revolution [rpm]	Tork Torque [Nm]	Makine Ağırlığı Machine Weight [kg]
VOLPI MRL2-3	0,63	1275	4,9	320x10x8	17,4	20	12,50	75	625	310
	1,00		7,8		23,7		19,83	119		
	1,60		12,5		33,2		31,83	191		
	2,00		15,6		39,0		39,83	239		
	2,50		19,5		48,8		49,67	298		
	0,63	1600	6,2	320x11x8	21,9		12,50	75	785	
	1,00		9,8		29,7		19,83	119		
	1,60		15,7		41,6		31,83	191		
	2,00		19,6		49,0		39,83	239		
	2,50		24,5		61,2		49,67	298		
	0,63	1000	3,9	360x7x8	13,7		11,17	67	552	320
	1,00		6,1		18,6		17,67	106		
	1,60		9,8		26,0		28,33	170		
	2,00		12,2		30,6		35,33	212		
	2,50		15,3		38,3		44,17	265		
	0,63	1275	4,9	360x8x8	17,4		11,17	67	704	
	1,00		7,8		23,7		17,67	106		
	1,60		12,5		33,2		28,33	170		
	2,00		15,6		39,0		35,33	212		
	2,50		19,5		48,8		44,17	265		
	0,63	1000	3,9	400x5x10	13,7		10,00	60	613	330
	1,00		6,1		21,7		15,83	95		
	1,60		9,8		26,0		25,50	153		
	2,00		12,2		32,5		31,83	191		
	2,50		15,3		38,3		39,83	239		
	0,63	1275	4,9	400x6x10	17,4		10,00	60	782	
	1,00		7,8		27,6		15,83	95		
	1,60		12,5		33,2		25,50	153		
	2,00		15,6		41,5		31,83	191		
	2,50		19,5		48,8		39,83	239		