

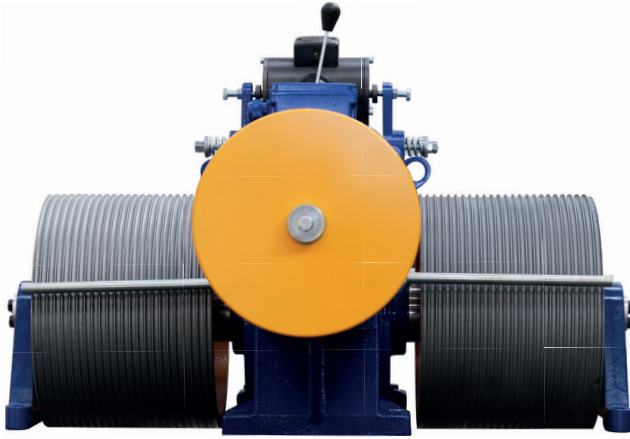
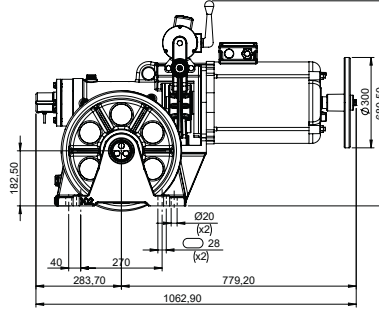
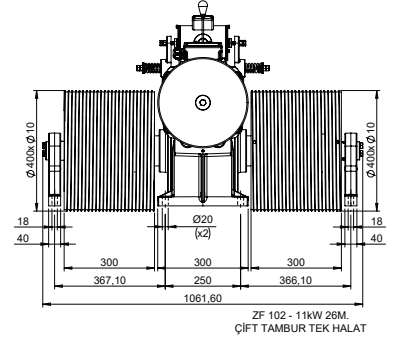
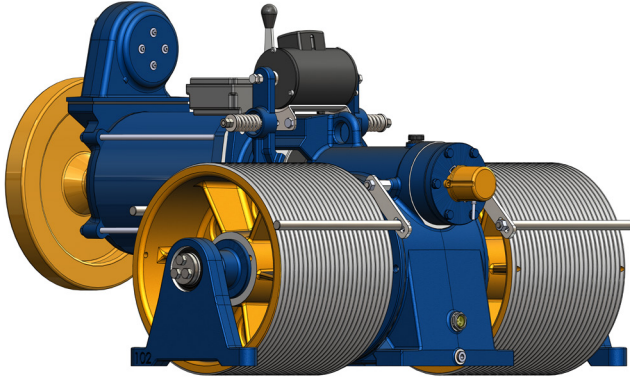


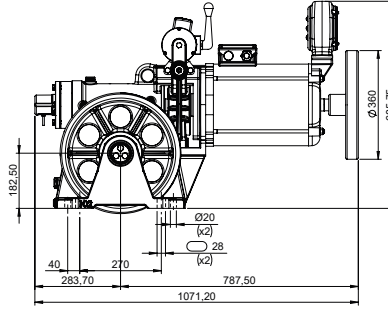

Ürün Product	Güç Power [Hp]																Hız Speed [m/s]	Tahvil Oranı Ratio	Kasnak Sheave [mm]
AC2	1,1	3,0	4	5,5	7,5	9,0	11,0	13,0	15,0	18,5	22,0	25,0	28,0	30,0	37,0	40,0			
Z40	100																0,31	1/41	240
Z60		350															0,38	1/54	260
		250															0,47	1/54	320
		200															0,66	2/62	260
		150															0,81	2/62	320
ZF82- VF2X			445	615	835												0,57	1/55	400
			465	640	870												0,59	1/53	
			420	575	785												0,67	1/47	
			370	510	695												0,73	1/43	
			330	455	620												0,83	1/38	
			280	385	525												1,03	2/61	
			265	360	495												1,08	2/58	
			245	335	455												1,31	2/48	
ZF102- VF3X					1245	1495	1830	2160	2495								0,48	1/66	
					1195	1435	1750	2070	2390								0,51	1/62	
					1075	1290	1580	1865	2155								0,57	1/55	
					820	985	1205	1420	1640								0,71	1/44	
					745	895	1095	1295	1495								0,81	1/39	
					700	840	1025	1210	1395								0,87	1/36	
					515	615	755	890	1025								1,28	2/49	
					340	405	495	585	675								2,05	3/46	
ZF112								2585	2980								0,49	1/64	
								1930	2225	2745	3265						0,68	1/46	
								1260	1455	1795	2135	2425	2715	2910			1,14	2/55	
								825	955	1175	1400	1590	1780	1910	2355	2545	1,85	3/51	

- Tamburlu makineler için tabloda belirtilen kapasiteler kabin dahil kapasitelerdir.
→ The capacities indicated in the table for the drum machine are the capacities including the cabin.

Maksimum Seyir Mesafesi	Max. Travel Distance	Tambur Özellikleri Drum Specifications			
		Tek Tambur Tek Halat Single Drum Single Rope	Tek Tambur Çift Halat Single Drum Double Rope	Çift Tambur Tek Halat Double Drum Single Rope	Çift Tambur Çift Halat Double Drum Double Rope
		6 metre 6 meter		✓	✓
		13 metre 13 meter		✓	✓
		26 metre 26 meter	Maksimum 20 metre Max. 20 meter	✓	Maksimum 20 metre Max. 20 meter
		40 metre 40 meter	Maksimum 20 metre Max. 20 meter	✓	Maksimum 20 metre Max. 20 meter

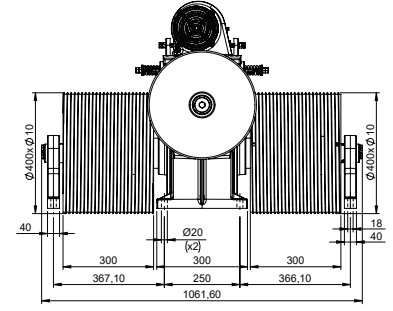

Z 102-10,5 HP
26M. Çift Tambur Tek Halat

Ürün Product	Güç Power [Hp]															Hız Speed [m/s]	Tahvil Oranı Ratio	Kasnak Sheave [mm]
AC2	4,5	5,5	6,2	7,5	8,2	10,5	12,5	14,0	16,0	20	25,0	30,0	34,0	40,0	45,0			
ZF82-VF2X	370	450	510	615	670	860										0,57	1/55	400
	385	470	530	640	700	900										0,59	1/53	
	345	425	480	580	630	810										0,67	1/47	
	310	375	425	515	560	720										0,73	1/43	
	275	335	380	455	500	640										0,83	1/38	
	230	285	320	385	420	540										1,03	2/61	
	220	265	300	365	395	510										1,08	2/58	
	200	245	280	335	365	470										1,31	2/48	
ZF102-VF3X						1285	1530	1710	1955	2445						0,48	1/66	
						1230	1465	1640	1875	2340						0,51	1/62	
						1110	1320	1480	1690	2110						0,57	1/55	
						845	1005	1125	1285	1610						0,71	1/44	
						770	915	1025	1170	1465						0,81	1/39	
						720	855	960	1095	1370						0,87	1/36	
						530	630	705	805	1005						1,28	2/49	
						350	415	465	530	665						2,05	3/46	
ZF112										2920						0,49	1/64	
										2180	2725	3270				0,68	1/46	
										1425	1785	2140	2425	2855	3210	1,14	2/55	
										935	1170	1405	1590	1870	2105	1,85	3/51	

- Tamburlu makineler için tabloda belirtilen kapasiteler kabin dahil kapasitelerdir.
→ The capacities indicated in the table for the drum machine are the capacities including the cabin.

Maksimum Seyir Mesafesi	Max. Travel Distance		Tambur Özellikleri Drum Specifications			
			Tek Tambur Tek Halat Single Drum Single Rope	Tek Tambur Çift Halat Single Drum Double Rope	Çift Tambur Tek Halat Double Drum Single Rope	Çift Tambur Çift Halat Double Drum Double Rope
		6 metre 6 meter	✓	✓	✓	✓
		13 metre 13 meter	✓	✓	✓	✓
		26 metre 26 meter	✓	Maksimum 20 metre Max. 20 meter	✓	Maksimum 20 metre Max. 20 meter
		40 metre 40 meter	✓	Maksimum 20 metre Max. 20 meter	✓	Maksimum 20 metre Max. 20 meter