Roller Guide Shoe (Adjustable)
Product code: 301

- Rail size allows adjustment between 5 mm, 9 mm, 16 mm.
- Used at speeds up to and including 1 m/s,
- Does not require maintenance.
- Provides ease of working in dusty and dirty environments,
- It provides ease of operation due to its flexibility to the places with variable sizes between rails.

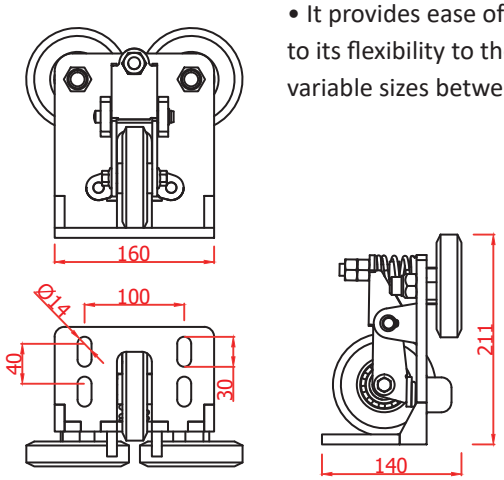

Roller Guide Shoe (Fixed)
Product code: 302



- Rail size allows adjustment between 5 mm, 9 mm, 16 mm.
- Used at speeds up to and including 1 m/s,
- Does not require maintenance.
- Provides ease of operation in dusty and dirty environments.

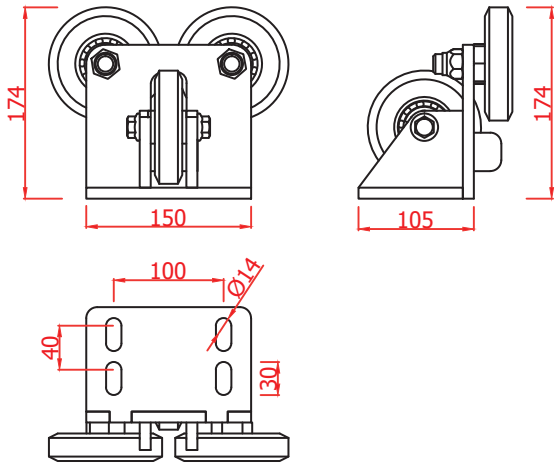

25' Roller
Product code: 303

- It is used as a balancing reel in lifts with L carcass,
- The maximum load it will carry is 300 kg,
- The roller body is eccentric and Provides 7 mm adjustment
- Diameter Ø 103 mm. Thickness Ø25 mm

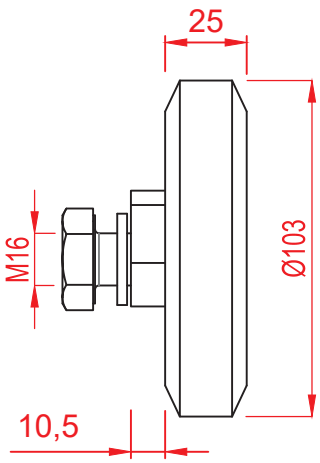

30’ Roller
Product code: 304
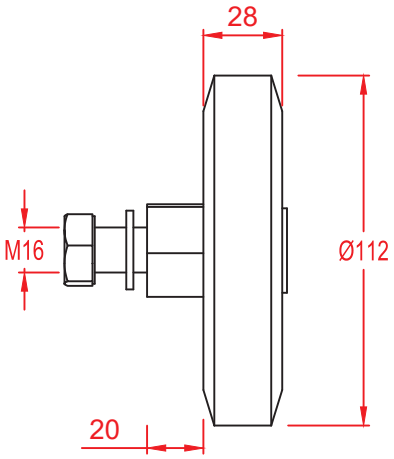
- It is used as a balancing reel in lifts with L carcass,
- The maximum load it will carry is 300 kg,
- The roller body is eccentric and allows 7 mm adjustment,
- Diameter Ø112 mm thickness Ø28 mm