

PL 130
Polyurethane Buffer
Product code: 918



PL 140
Polyurethane Buffer
Product code: 919




PL 150
Polyurethane Buffer
Product code: 920



Polyurethane Lift Buffers

Polyurethane buffers are produced to stop the cabin comfortably and within the acceleration range determined by the standards, in case the lift continues without seeing the ground floor.

- PL 130 is used at 1m/sec between 500kg...2400 kg,
- PL 140 is used at 1m/sec between 500kg...3500 kg,
- PL 150 is used at 1m/sec between 500kg...5300 kg,
- 500kg TSE EN 81-50, TSE EN 81-20, EAC standards,
- Provides easy assembly,
- Provides ease of maintenance.

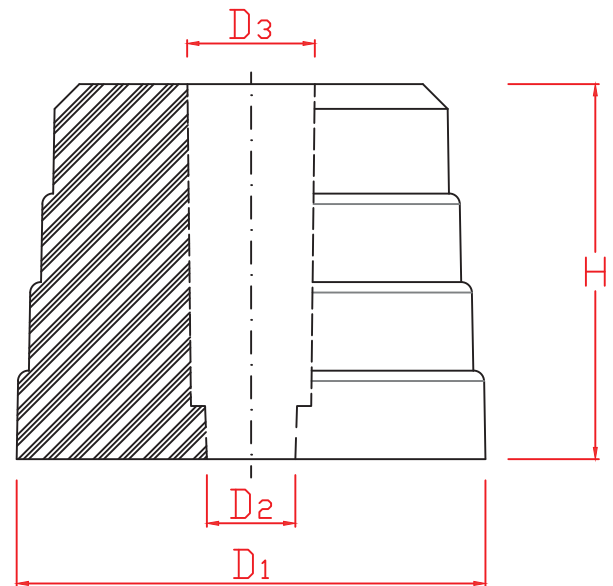

Models	Capacity			Dimensions			
	Hız m/s	Min.kg	Max.kg	H (mm)	D1 (mm)	D2 (mm)	D3 (mm)
PL 130	1	500	2400	106	135	25	36
PL 140	1	500	3500	142	140	25	36,80
PL 150	1	500	5300	183	150	25	37,70